

Power Relay

TRIH


MAIN FEATURES

- Miniature heavy-duty relays
- 5KV dielectric coil to contacts
- Single-Pole, 10 Amp PC Board
- Sealed & Unsealed types available
- SPST and SPDT configurations
- UL · cUL and TUV recognized.

APPLICATIONS

- Microwave Ovens, Facsimiles, Refrigerators Air Conditioners, Stereo Equipment, Copier, TV Set, Vending Machines, Temperature Controllers, etc.

ORDERING INFORMATION

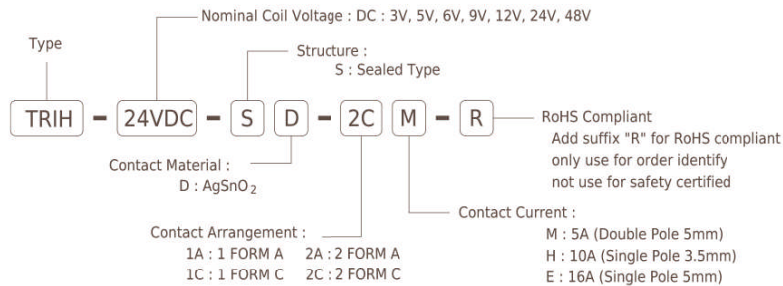

COIL DATA CHART(at 20°C)


Coil Sensitivity	Nominal Voltage (VDC)	Nominal Current (mA ±10%)	Coil Resistance (Ω ±10%)	Power Consumption (mW)	Pick-Up Voltage VDC(Max.)	Drop-out Voltage VDC(Min.)	allowable Voltage VDC (Max.)
TRIH (DC TYPE)	3	176	17	Approx. 530	80% Max.	10% Min. of nominal voltage	110% of nominal voltage
	5	106	47				
	6	88.2	68				
	9	56.2	160				
	12	43.6	275				
	24	21.8	1100±15%				
48	11.5	4170±15%					

CONTACT RATING


Item	TRIH - E		TRIH - H		TRIH - M	
	E-Type		H-Type		M-Type	
Resistive load (cosφ=1)	UL	16A 250VAC	10A 250VAC	10A 30VDC	10A 250VAC	
		16A 24VDC	10A 30VDC	10A 30VDC	10A 30VDC	
	TUV	1HP 240VAC	1/3HP 250VAC	TV-3 125VAC		
		TV-8 125VAC(*)	TV-5 125VAC			
Carrying current	16A		10A		5A	
Max. switching voltage	277VAC, 30VDC					
Max. switching current	16A		10A		5A	
Max. switching power	4000VA	2000VA	2500VA	1875VA	1250VA	500VA
	300W	192W	300W	150W	150W	90W
Min. permissible load	DC 5V 100mA			DC 5V 10mA		
Contact material	Silver Alloy					

DIMENSION(unit:mm)


M Type






H Type




E Type




DRILLING(unit:mm)




WIRING DIAGRAM



(De-energized Position)



(De-energized Position)



(De-energized Position)

※ TRIH E-Type Form A(N.O.) Only.

PERFORMANCE(at initial value)

Item	TRIH
Contact Resistance	50mΩ Max.
Operation time	15msec Max. (at nominal voltage)
Release time	10msec Max. (at nominal voltage)
Dielectric strength	Between coil & contacts: 5000VAC. for 1minute Between open contacts: 3000VAC. for 1minute Between contact sets: 1000VAC. for 1minute
Insulation Resistance	100MΩ Min. (at 500VDC)
Operating frequency	20 ops/minute
Ambient temperature	Storage: -40°C to +70°C Operating: -40°C to +70°C
Humidity	35% to 85% RH
Vibration resistance	10 to 55 Hz, 1.5mm double amplitude
Shock resistance	Functional : 98m/s ² Destructive : 980m/s ²
Life expectancy	Mechanical : 1 x 10 ⁷ operations Electrical : 1 x 10 ⁵ operations (at rated load)
Weight	abt. 18g.
UL & cUL	E156406

1.Tolerance ±0.5mm on all dimensions unless otherwise stated.
2. Tolerance ±0.1mm on PCB DRILLING dimension unless otherwise stated.